

# ステンレス製ねじ込み管継手

MADE OF STAINLESS STEEL

SCS13A SUS304

検査圧力 (耐圧) 2.45Mpa { 25kgf/cm<sup>2</sup> } (水圧)  
 (漏れ) 0.49Mpa { 5kgf/cm<sup>2</sup> } (空圧)

品名	90° エルボ	バンド無エルボ	チー	バンド無チー
記号	L	LX	T	TX
形状				
呼び径(B)	A1	A1	A2	A2
1/8	17	17	17	17
1/4	19	19	19	19
3/8	23	23	23	23
1/2	27	27	27	27
3/4	32	32	32	32
1	38	38	38	38
1 1/4	45	45	45	45
1 1/2	48	48	48	48
2	57	57	57	57
2 1/2	69		69	
3	78		78	
4	98		98	

品名	45° エルボ	ユニオン	ストリートエルボ	クロス
記号	45L	U	S L	X
形状				
呼び径(B)	A3	L1	A4	A6
		S1	A5	
1/8	16	30.5	17	18.5
1/4	17	34	19	18.5
3/8	19	37	23	22.5
1/2	21	39.5	27	27.5
3/4	25	42.5	32	33.5
1	29	51	38	38.5
1 1/4	33	55	46	46.5
1 1/2	37	58	48	49.5
2	42	65.5	57	57.5
2 1/2	49	81.5	69	68.5
3	54	91	78	77.5
4	65	112		96.5

は、引出品です。

単位：mm



NAGOYA Co., Inc

SCS13A SUS304

検査圧力 (耐圧) 2.45Mpa { 25kgf/cm<sup>2</sup> } (水圧)  
 (漏れ) 0.49Mpa { 5kgf/cm<sup>2</sup> } (空圧)



ステンレス製ねじ込み管継手

MADE OF STAINLESS STEEL



品名	四角プラグ		キャップ		六角ニップル	
記号	P		C		S N	
形状						
呼び径 (B)	B1	L2	D1	L3	L4	S2
1/8	7	16	14	12.5	28	12
1/4	9	19	18	16	34	14
3/8	12	21	22	17	36	17
1/2	14	26	28	21	42	22
3/4	17	28	32	23	47	27
1	19	33	40	27	52	35
1 1/4	23	36	50	35	56	43
1 1/2	26	38	56	35	60	49
2	32	42	70	36	66	61
2 1/2	41	50	85	42	73	80
3	46	55	98	47	81	95
4	58	64	128	56	92	120

1/2<sup>B</sup> 迄6角 3/4<sup>B</sup> ~ 2<sup>B</sup> 迄8角 2 1/2<sup>B</sup> 以上10角

品名	径違いエルボ		径違いチー	
記号	R	L	R	T
形状				
呼び径 (B)	A7	A8	A9	A10
1/4 x 1/8	18	18	18	18
3/8 x 1/4	20	22	20	22
1/2 x 1/4	24	24	24	24
1/2 x 3/8	26	25	26	25
3/4 x 3/8	28	28	28	28
3/4 x 1/2	29	30	29	30
1 x 1/2	32	33	32	33
1 x 3/4	34	35	34	35
1 1/4 x 3/4	38	40	38	40
1 1/4 x 1	40	42	40	42
1 1/2 x 1	41	45	41	45
1 1/2 x 1 1/4	45	48	45	48
2 x 1 1/4	48	54	48	54
2 x 1 1/2	52	55	52	55

品名	六角ホースニップル				
記号	S H N				
形状					
呼び径 (B)	L5	D2	S3	L6	
1/8	33	6	12	3	
1/4	39	9	14	4.5	
3/8	45	10.5	17	5	
1/2	53	14	22	6	
3/4	67	20	27	8	
1	81	26.5	35	10	
1 1/4	92	33.5	43	10	
1 1/2	97	40	49	10	
2	110	52.5	61	11	

1/2<sup>B</sup> 迄6角 3/4<sup>B</sup> 以上8角

は、引出品です。



NAGOYA Co.,Inc

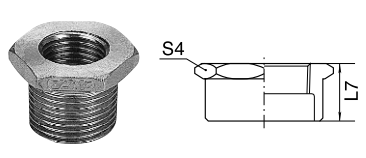


単位: mm

# ステンレス製ねじ込み管継手

MADE OF STAINLESS STEEL

SCS13A (SUS304)

検査圧力 (耐圧) 2.45Mpa { 25kgf/cm<sup>2</sup> } (水圧)  
(漏れ) 0.49Mpa { 5kgf/cm<sup>2</sup> } (空圧)

品名 記号	ブッシング		六角異径ニップル		異径ソケット		
	B		SRN		R S		
形状							
	1 1/2 <sup>B</sup> 迄6角 2 <sup>B</sup> 以上8角		1/2 <sup>B</sup> 迄6角 3/4 <sup>B</sup> 以上8角				
呼び径 (B)	L7	S4	L8	S5	d1	d2	L9
1/4 × 1/8	17	17	33	14	19	15	25
3/8 × 1/8	18	21	34	17	23	15	28
3/8 × 1/4	18	21	35	17	23	19	28
1/2 × 1/8	21	26					
1/2 × 1/4	21	26	38	22	27	19	34
1/2 × 3/8	21	26	39	22	27	23	34
3/4 × 1/8	24	34					
3/4 × 1/4	24	34					
3/4 × 3/8	24	34	42	27	33	23	38
3/4 × 1/2	24	34	45	27	33	27	38
1 × 1/4	27	38					
1 × 3/8	27	38					
1 × 1/2	27	38	48	35	41	27	42
1 × 3/4	27	38	50	35	41	33	42
1 1/4 × 3/8	30	46					
1 1/4 × 1/2	30	46			50	27	48
1 1/4 × 3/4	30	46	52	43	50	33	48
1 1/4 × 1	30	46	54	43	50	41	48
1 1/2 × 1/2	32	54					
1 1/2 × 3/4	32	54			56	33	52
1 1/2 × 1	32	54	57	49	56	41	52
1 1/2 × 1 1/4	32	54	59	49	56	50	52
2 × 3/4	36	63					
2 × 1	36	63	61	61	69	41	58
2 × 1 1/4	36	63	63	61	69	50	58
2 × 1 1/2	36	63	64	61	69	56	58
2 1/2 × 1	39	80					
2 1/2 × 1 1/4	39	80			86	50	65
2 1/2 × 1 1/2	39	80			86	56	65
2 1/2 × 2	39	80			86	69	65
3 × 1 1/4	44	95					
3 × 1 1/2	44	95			99	56	72
3 × 2	44	95			99	69	72
3 × 2 1/2	44	95			99	86	72
4 × 1 1/2	51	120					
4 × 2	51	120					
4 × 2 1/2	51	120					
4 × 3	51	120					

は、引出品です。

単位：mm



NAGOYA Co., Inc

品名	5Kねじ込みフランジ (ロストワックス品)											10Kねじ込みフランジ (ロストワックス品)																														
記号	5KFL											10KFL																														
形状																																										
																							呼び径 (B)	D	T	G	f	ボルト穴		ボルトの呼び	A	B	D	T	G	f	ボルト穴		ボルトの呼び	A	B	
	C	数	h												C	数	h																									
1/2	80	9	44	1	60	4	12	M10	16	30	95	12	51	1	70	4	15	M12	16	30																						
3/4	85	10	49	1	65	4	12	M10	18	36	100	14	56	1	75	4	15	M12	18	36																						
1	95	10	59	1	75	4	12	M10	18	45	125	14	67	1	90	4	19	M16	18	45																						
1 1/4	115	12	70	2	90	4	15	M12	21	54	135	16	76	2	100	4	19	M16	21	54																						
1 1/2	120	12	75	2	95	4	15	M12	21	60	140	16	81	2	105	4	19	M16	21	60																						
2	130	12	85	2	105	4	15	M12	22	76	155	16	96	2	120	4	19	M16	22	76																						
2 1/2	155	14	110	2	130	4	15	M12	26	92	175	18	116	2	140	4	19	M16	26	92																						
3	180	14	121	2	145	4	19	M16	30	105	185	18	126	2	150	8	19	M16	30	108																						
4	200	16	141	2	165	8	19	M16	35	135	210	18	151	2	175	8	19	M16	35	136																						

単位 : mm

# ステンレス製ねじ込み管継手

MADE OF STAINLESS STEEL

SUS304

検査圧力 (耐圧) 2.45Mpa { 25kgf/cm<sup>2</sup> } (水圧)  
(漏れ) 0.49Mpa { 5kgf/cm<sup>2</sup> } (空圧)

品名	ステンレスニップル (片ネジも含む)											ステンホースニップル		
記号	N (NS)		N L (NSL)									H N		
形状														
呼び径 (B)	外径	L											L	E × 数
		パレル	50	65	75	100	125	150	200	250	300			
1/8	10.5	24	○	○	○	○	○	○	○	○	○	41	4.3 4	
1/4	13.8	26	○	○	○	○	○	○	○	○	○	41	4.3 4	
3/8	17.3	28	○	○	○	○	○	○	○	○	○	42	4.3 4	
1/2	21.7	34	○	○	○	○	○	○	○	○	○	52	6.0 4	
3/4	27.2	38	○	○	○	○	○	○	○	○	○	55	6.0 4	
1	34.0	42	○	○	○	○	○	○	○	○	○	60	6.0 4	
1 1/4	42.7	50			○	○	○	○	○	○	○	66	8.0 4	
1 1/2	48.6	50			○	○	○	○	○	○	○	70	8.0 4	
2	60.5	58			○	○	○	○	○	○	○	80	8.0 4	
2 1/2	76.3	70				○	○	○	○	○	○	150	11.0 4	
3	89.1	78				○	○	○	○	○	○	150	11.0 4	
4	114.3	90				○	○	○	○	○	○	150	11.0 4	

品名	ステン丸型サイホン		ステンU型サイホン	
記号	M O		M U	
呼び径 (B)	3/8 B		3/8 B	
形状				

単位: mm

は、引出品です。

SUS304 / SUS316

検査圧力 (耐圧) 2.45Mpa { 25kgf/cm<sup>2</sup> } (水圧)  
 (漏れ) 0.49Mpa { 5kgf/cm<sup>2</sup> } (空圧)



ステンレス製ねじ込み管継手

MADE OF STAINLESS STEEL



品名	ステンソケットストレート		ステンハーフソケット		ステンJISソケットストレート	
記号	S		H S		J S	
形状						
呼び径 (B)	D	L	D	L	D	L
1/8	13.8	20.0	13.8	12.0		
1/4	17.0	25.0	17.0	15.0	19.0	27.0
3/8	21.0	26.0	21.0	16.0	23.0	28.0
1/2	25.0	33.0	25.0	20.0	28.0	37.0
3/4	31.0	36.0	31.0	21.0	34.5	39.0
1	38.0	43.0	38.0	25.0	41.5	46.0
1 1/4	47.0	48.0	47.0	28.0	51.0	51.0
1 1/2	53.0	48.0	53.0	28.0	58.0	51.0
2	66.0	56.0	66.0	34.0	70.0	60.0
2 1/2	82.0	65.0	82.0	39.0		
3	95.0	70.0	95.0	42.0		
4	121.0	84.0	121.0	50.0		

品名	ステンテーパソケット		ステンハーフテーパソケット		ステンソケットストレート	
記号	T S		H T S		M S	
形状						
呼び径 (B)	D	L	D	L	D	L
1/8	15.0	23.0			13.8	20.0
1/4	19.0	29.0	19.0	18.0	17.0	25.0
3/8	22.0	30.0	22.0	18.0	21.0	26.0
1/2	27.0	38.0	27.0	21.0	25.0	33.0
3/4	33.0	40.0	33.0	21.0	31.0	36.0
1	40.0	45.0	40.0	25.0	38.0	43.0
1 1/4	49.0	51.0	49.0	27.0	47.0	48.0
1 1/2	55.5	54.0	55.5	27.0	53.0	48.0
2	68.0	64.0	68.0	32.0	66.0	56.0
2 1/2	83.0	73.0			82.0	65.0
3	97.0	81.0			95.0	70.0
4	125.0	93.0			121.0	84.0

は、引出品です。



は、SUS316です。

単位 : mm